


WK-Alu Stretch

Color-coated stretched aluminium – the rational and economic system solution with all-over self-adhesive butyl adhesive

WK-Alu Stretch is a universal sealing tape for joints on walls and chimneys, rising components and diverse joints in the roof area.

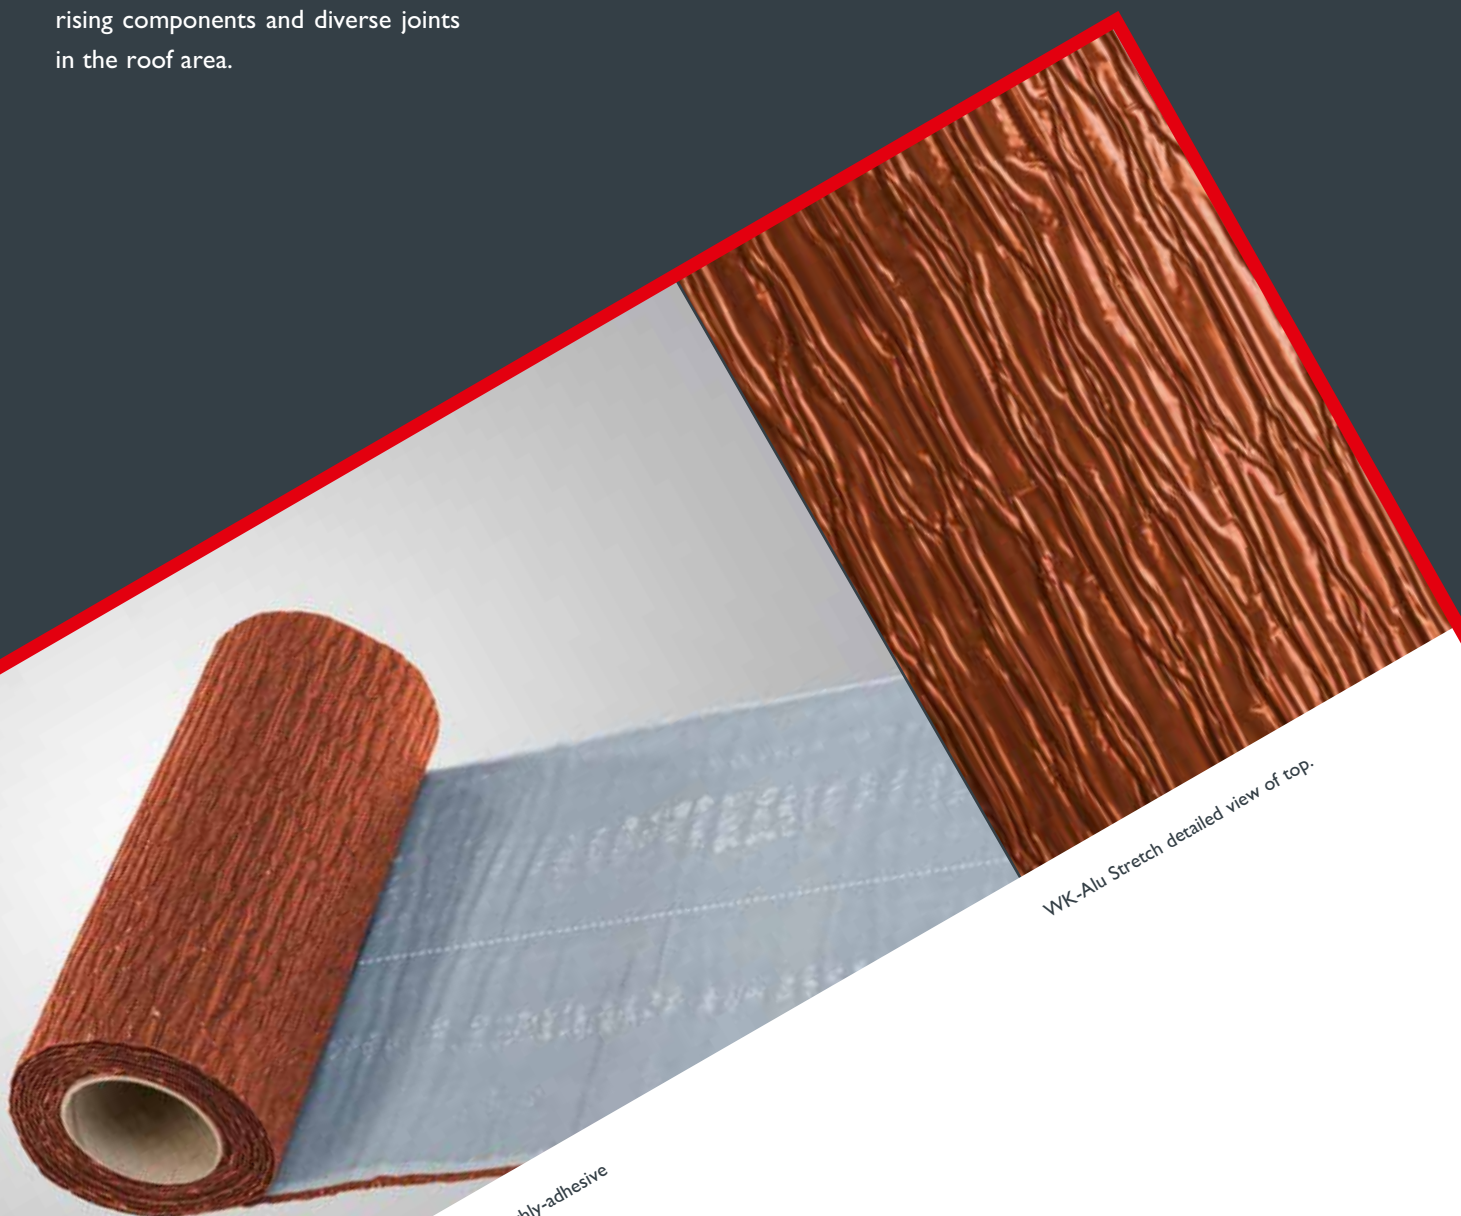

WK-Alu Stretch detailed view of top.

Easy-to-shape stretched aluminium in roll format with all-over highly-adhesive butyl bonding layer and two-part separating layer.



WK-Alu Stretch



Overlapping adhesion without any problem.

● Function

WK-Alu Stretch is a self-adhesive sealing tape made from stretched aluminium with an elongation of approx. 60% in the roll direction. Thanks to its high elasticity, WK-Alu Stretch is easy to shape for all joints in the roof area and is ideally suitable for the diverse shapes of small-format roof elements. The highly-adhesive bonding layer on the underside ensures a reliable and lasting seal between the roof tiles and rising components.

● Installation

Easy. Fast. Permanent. WK-Alu Stretch does not need any special tools. Apart from a tape measure, pencil and scissors, you only require a rubber pressure roller. WK-Alu Stretch is cut to the corresponding length using scissors and laid out roughly following the course of the roof. After pulling the covering film off the adhesive layer on the back, the material is pressed on. Once you have fixed the position, continue pulling off the covering film gradually, press the material down and stretch it up to 60%, if required. The side joints are now firmly pressed down using the pressure roller. WK-Alu Stretch tapes can also be bonded on top of one another. When doing so, make sure that the aluminium is pressed smoothly onto the overlapping adhesion point with the pressure roller and is tightly joined to the substrate. Corner areas must be sealed with particular care. After adhesion of WK-Alu Stretch, the surface of the material is fixed with a standard aluminium rail, which should be firmly doweled and sealed with a permanently elastic sealant.



WK-Alu Stretch detailed view of top.

Accessories:



WK wall connection bar



Plumbing screws, color coated

● Technical data

Basic material:	Top aluminium EN AW 8021, soft, with UV stove enamel finish, bottom PET film
Glue material:	Butyl strip material I 185, 290 mm x 1.2 mm
Total thickness:	1.4 mm
Temperature resistance:	-30 °C to +80 °C
Processing temperature:	+5 °C to +40 °C
Roll width:	300 mm
Roll length:	5 m
Colors:	black, red, brown, chestnut

We expressly reserve technical changes serving product improvement.

Your IVT expert dealer:



Visit us on
the internet:
www.ivt.de

IVT – Industrie Vertrieb Technik GmbH & Co. KG

August-Borsig-Straße 30 · 59439 Holzwickede (Germany)
Phone: +49 2301 91011-0 · Fax: +49 2301 91011-24
info@ivt.de · www.ivt.de

